



CONTROLLING ENVIRONMENTAL POLLUTION THROUGH CONCRETE TECHNOLOGY

Kaur Manmeet, Singh Jaspal, Kaur Manpreet

Department of Civil Engineering, Punjab Agriculture University, Ludhiana

ABSTRACT

The increasing amount of wastes is a concerning reality that has arose the sustainability issues for the environment. Large amount of wastes such as fly ash (from thermal plant), hypo sludge (from paper mill industry) etc. are generated annually which are generally disposed by landfills leading to environmental pollution. Hypo plant in the paper industry generates large volume of waste in the form of slurry. This solid waste directly affects the soil properties and contributes to the soil pollution. Also, the production of cement accounts the global warming by releasing carbon dioxide in atmosphere. Therefore formulation of concrete with industrial waste can help in minimizing the environmental problem. In this study hypo sludge was used as replacement of cement in concrete. Polypropylene fiber (PPF) was added to strengthen the concrete. In this research work 25 mixes were prepared at different replacement levels of hypo sludge (0%, 5%, 10%, 15% & 20%) and polypropylene fiber (0%, 0.25%, 0.5%, 0.75% & 0.10%) for M-20 mix. Workability was determined, the compressive strength and splitting tensile strength of concrete were tested after 7, 14 and 28 days of curing.

KEYWORDS: Industrial Waste, Hypo Sludge, Fiber, Workability, Compressive Strength, Splitting Tensile Strength, Coefficient of Brittleness

INTRODUCTION

Disposal of industrial waste has become the major problem to the environment. To approach sustainable development industrial waste must be utilized in an innovative way. Industrial wastes are being produced per annum by chemical and agricultural process in India. The use of these wastes offers environmental advantages like divert the material from the waste stream, reduce the energy used in processing virgin materials, use of virgin materials, and decreases pollution. Paper mill sludge is a major economic and environmental problem for the paper and board industry. The material is a by-product of the de-inking and re-pulping of paper [12]. Three mills among eight mills are using calcium hypo chlorite in final stage for bleaching. Solid wastes generated during calcium hypo chlorite generation are called hypo sludge [2]. The paper mill sludge consumes a large percentage of local landfill space for disposal every year. Hypo sludge is directly polluting the environment through its disposal on land causing soil pollution, its incineration causing air pollution or its disposal in streams causing water pollution. Hypo sludge behaves like cement because of silica and magnesium properties which improve the setting of the concrete. Paper fiber can be recycled only a limited number of times before they become too short or weak to make high quality of paper. Hypo sludge contributes beneficial properties to the concrete while helping to maintain economy and saving the environment. Many researchers have investigated the feasibility of using the paper industry waste in concrete

production as partial replacement of cement. The use of hypo sludge in concrete can save the paper industry disposal costs and produces a green concrete for construction [13]. Moreover, all the generated residues from cellulose and paper manufacturing are classified as not dangerous in the Catalogue of European Residues (CER). The current residues produced in the manufacture of paper, which are used in the ceramics industry and in agricultural compost, are catalogued as clean [10].

Concrete made with portland cement is relatively strong in compression but weak in tension and tends to be brittle. Another fundamental weakness of concrete is that cracks start to form as soon as concrete is placed and before it has properly hardened. So the failure of concrete can be minimized by the inclusion of a sufficient volume of certain fibers. Polypropylene is a synthetic hydrocarbon polymer, the fiber of which is made using extrusion processes by hot drawing the material through a die. Its use enables reliable and effective utilization of intrinsic tensile and flexural strength of the material along with significant reduction of plastic shrinkage cracking and minimizing of thermal cracking [1]. Therefore one of the useful and cost benefit ways to increase strength and corrosion resistance, and reduce cracks extension is the usage of PPF in the mixture of concrete [11].

Present study has been accomplished in attempt to reduce pollution due to hypo sludge. The workability and strength characteristics were studied.

MATERIALS USED**Cement**

Cement conforming to specifications given in BIS: 8112-1989 was used. Cement was carefully stored to prevent the

deterioration in its properties due to contact with the moisture. It was free and free from lumps. Ordinary Portland cement (OPC) of grade 43 from a single lot was used in this study. Table 1 shows the properties of OPC 43 grade.

Table 1: Properties of OPC 43 grade cement

Sr. No.	Characteristics	Value Obtained experimentally	Values specified by IS: 8112-1989
1.	Specific Gravity	3.15	-
2.	Standard consistency	31.5%	-
3.	Initial Setting time	140 minutes	30 minutes (minimum)
4.	Final Setting time	270 minutes	600 minutes (maximum)
5.	Compressive Strength - 3 days	24.60 N/mm ²	23 N/mm ²
	7 days	35.87 N/mm ²	33 N/mm ²
	28 days	48.45 N/mm ²	43 N/mm ²

Fine aggregates

Fine aggregates were collected from Chakki River (Pathankot). It was coarse sand, brown in colour. Specific

gravity of fine aggregates was experimentally determined as 2.72. Fine aggregates are conforming to grading zone II as per BIS-383:1970 are shown in Table 2.

Table 2: Sieve analysis of fine aggregates

Total weight of sample = 500 g

IS- Sieve Designation	Weight Retained on sieve (g)	%age Weight retained on sieve	Cumulative %age weight retained on sieve	%age passing	%age passing for grading zone-II as per IS: 383-1970
10 mm	Nil	Nil	Nil	100	100
4.75 mm	40	8.00	8.00	92.00	90-100
2.36 mm	23	4.60	12.60	87.40	75-100
1.18 mm	73	14.60	27.20	72.80	55-90
600 micron	111	22.20	49.40	50.60	35-55
300 micron	123	24.60	74.00	26.00	8-30
150 micron	120	24.00	98.00	2.00	0-10

Coarse aggregates

The coarse aggregates used were a mixture of two locally available crushed stone of 10 mm and 20 mm size in 50:50 proportions. The aggregates were washed to remove dirt, dust

and then dried to surface dry condition. Specific gravity was found to be 2.65. Coarse aggregates are conforming to grading zone II as per BIS-383:1970 are shown in Table 3.

Table 3: Sieve analysis of proportioned of coarse aggregates

IS- Sieve Designation	Weight Retained on sieve (10 mm agg. g)	Weight Retained on sieve (20mm agg. g)	50:50 Proportion (10 mm: 20mm) Weight Retained	Cumulative weight retained (g)	Cumulative %age weight retained	% age passing	BIS: 383-1970 Requirements
80 mm	Nil	Nil	Nil	Nil	Nil	100	100
40 mm	Nil	Nil	Nil	Nil	Nil	100	100
20 mm	8	5	5.60	5.60	0.28	99.72	95-100
10 mm	587	1973	1278	1283.6	64.18	35.82	26-55
4.75 mm	1265	22	646.5	1930.1	96.50	3.50	0-10

Hypo sludge

Hypo sludge obtained from Shreyans Paper Mill Ltd (Ahmedgarh) was used in this study. The slurry from the hypo plant of paper mill was collected in the brick pits. After that

slurry was allowed to evaporate insun till the moisture exhaust for few days. Then it was ground and sieved. The properties of hypo sludge and its comparison with cement are given in Table 4.

Table 4: Comparison of the properties of hypo sludge with cement

Serial no.	Constituents	Cement (%)	Hypo sludge (%)
1	Lime (CaO)	62	46.2
2	Silica (SiO ₂)	22	9
3	Magnesium oxide (MgO)	5	3.33
4	Aluminum (Al ₂ O ₃)	1	3.6
5	Calcium sulphate (Ca ₂ SO ₄)	4	4.05

Source: -Experimental Investigation in Developing Low Cost Concrete from Paper Industry Waste

Polypropylene fibers (PPF)

Polypropylene fibers obtained from FORTA CORPORATION (Brand name: ECONO-NET) was used in

this study. Polypropylene fiber was used to enhance the strength of concrete. Its properties are given in Table 5.

Table 5: Properties of polypropylene fibers

1.	Material	Virgin homopolymer polypropylene
2.	Colour	White
3.	Specific gravity	0.91
4.	Length	38 mm
5.	Acid /alkali resistance	Excellent

Water

Fresh and clean tap water was used for casting the specimens in the present study. The water was relatively free from organic matter, silt, oil, sugar, chloride and acidic material as per BIS: 456-2000.

LABORATORY TESTING PROGRAM**Mix design and sample preparation**

Control mix following the guidelines of BIS 10262- 2009 was selected after different trials. Then 24 mixes were prepared other than control mix at different replacement levels of hypo sludge (0%, 5%, 10%, 15% & 20%) and polypropylene fiber (0%, 0.25%, 0.5%, 0.75% & 0.10%). First 5 mixes were

prepared with variation of hypo sludge keeping PPF 0%. Similarly other mixes were prepared by increasing the fiber content. Cement was replaced with hypo sludge and polypropylene fiber (PPF) was used as an additive in concrete. The water/cement (w/c) ratio and water content were kept 0.55 and 186 litres/m³ respectively. The compressive strength and splitting tensile strength was determined after 7, 14 and 28 days of curing. The workability of concrete was determined using slump test. The workability of concrete decreases as the content of hypo sludge and polypropylene fiber increases shown in Figure 1. This is due the higher water absorption capability of hypo sludge and increase in voids due to the addition of PPF.

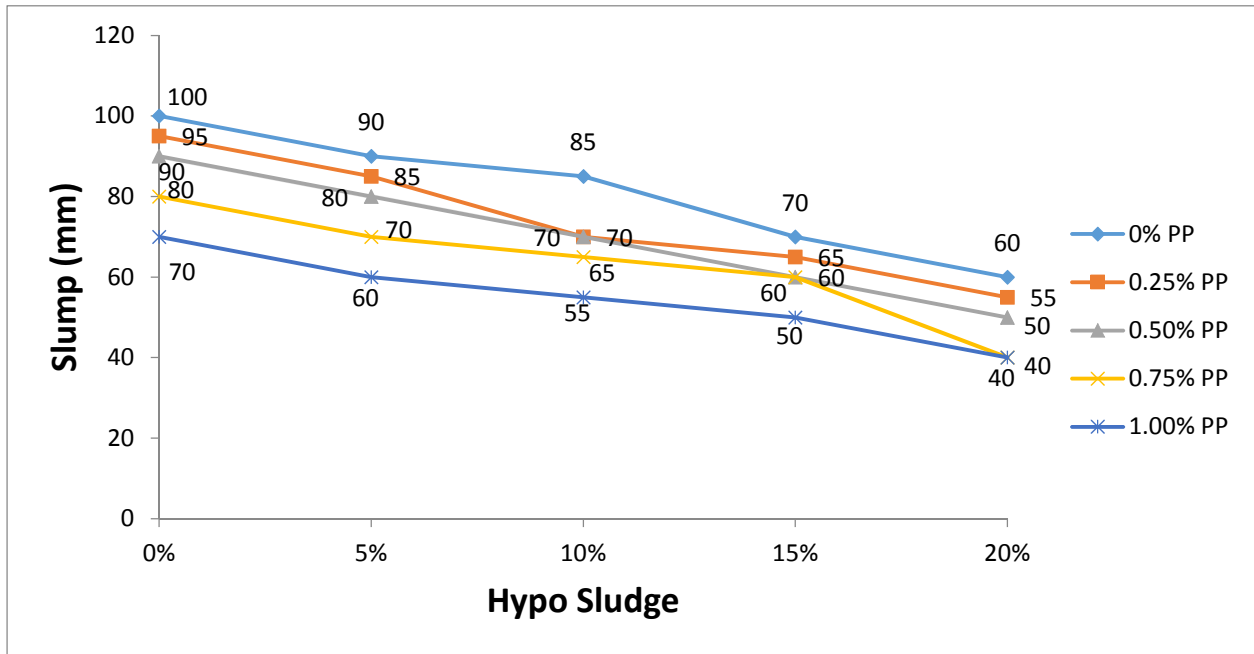


Figure 1: Degree of Workability of various mixes using Slump test

RESULTS AND DISCUSSIONS

Compressive strength and splitting tensile strength of concrete

To determine the compressive strength (as per BIS: 516 - 1959) and splitting tensile strength (as per BIS: 5816: 1999) the cubes of size 150mm were casted under Universal Testing

Machine (UTM). The values of average compressive strength and splitting tensile strength for different replacement levels of hypo sludge (0%, 5%, 10%, 15%, 20%) and polypropylene fiber (0%, .25%, 0.50%, 0.75% and 1.00%) at the end of different curing periods (7 days, 14 days & 28 days) are shown in Figure 2 to Figure 7.

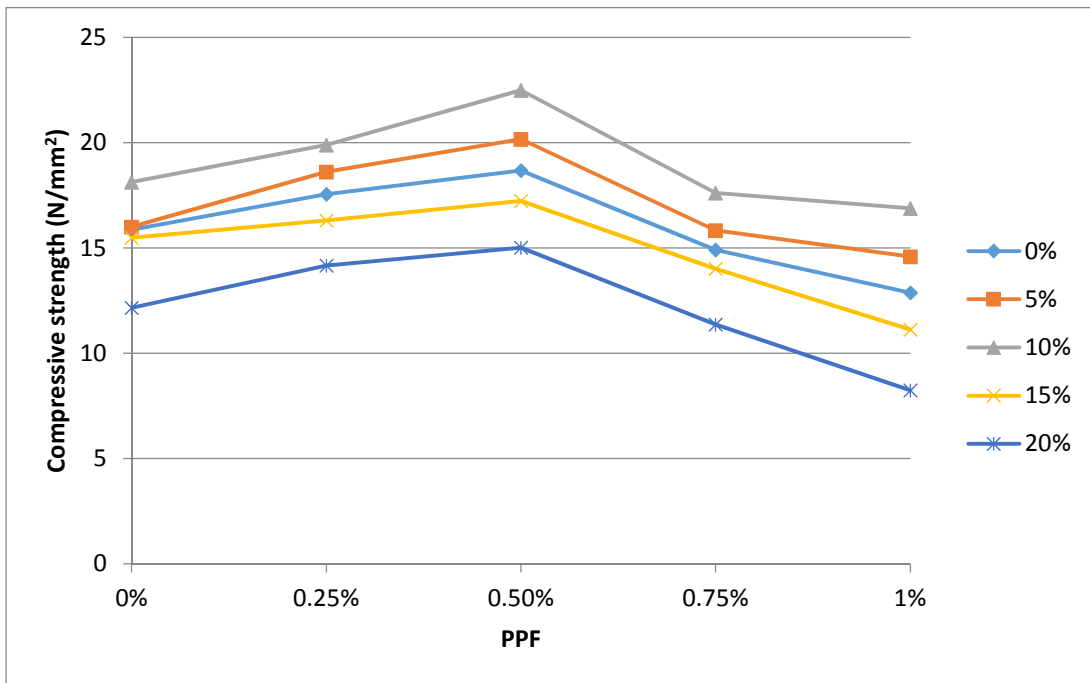


Figure 2: Compressive strength of different mixes at 7 days

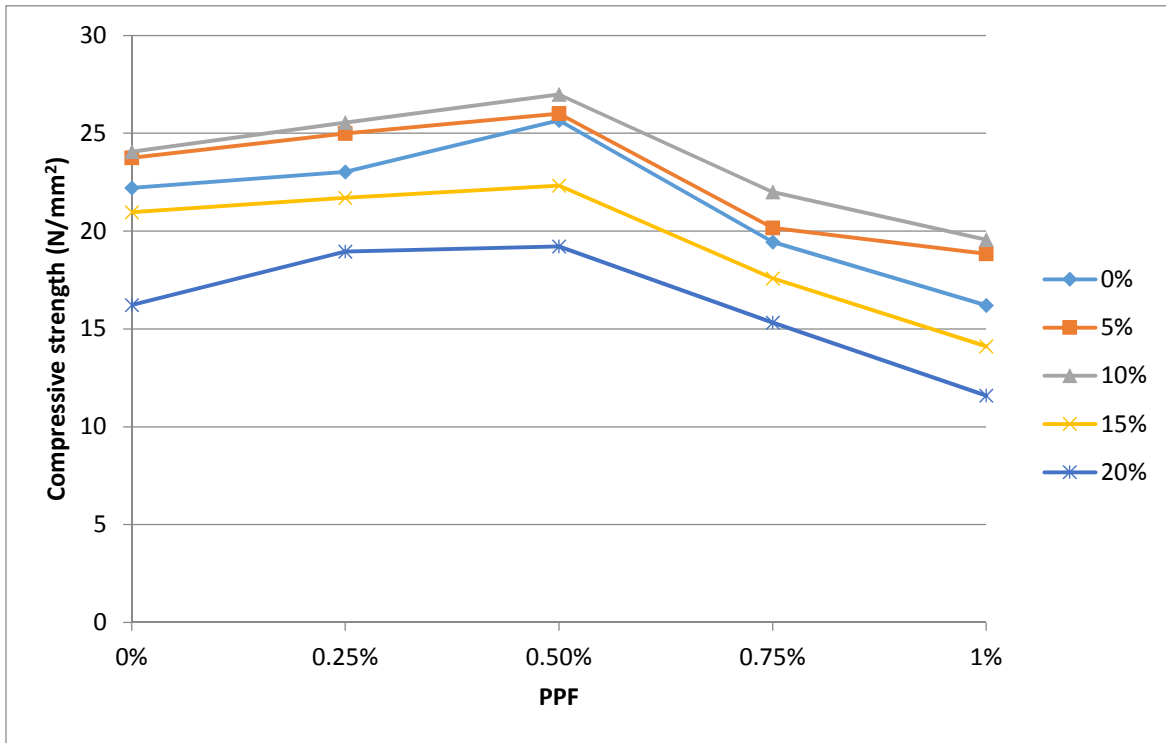


Figure 3: Compressive strength of different mixes at 14 days

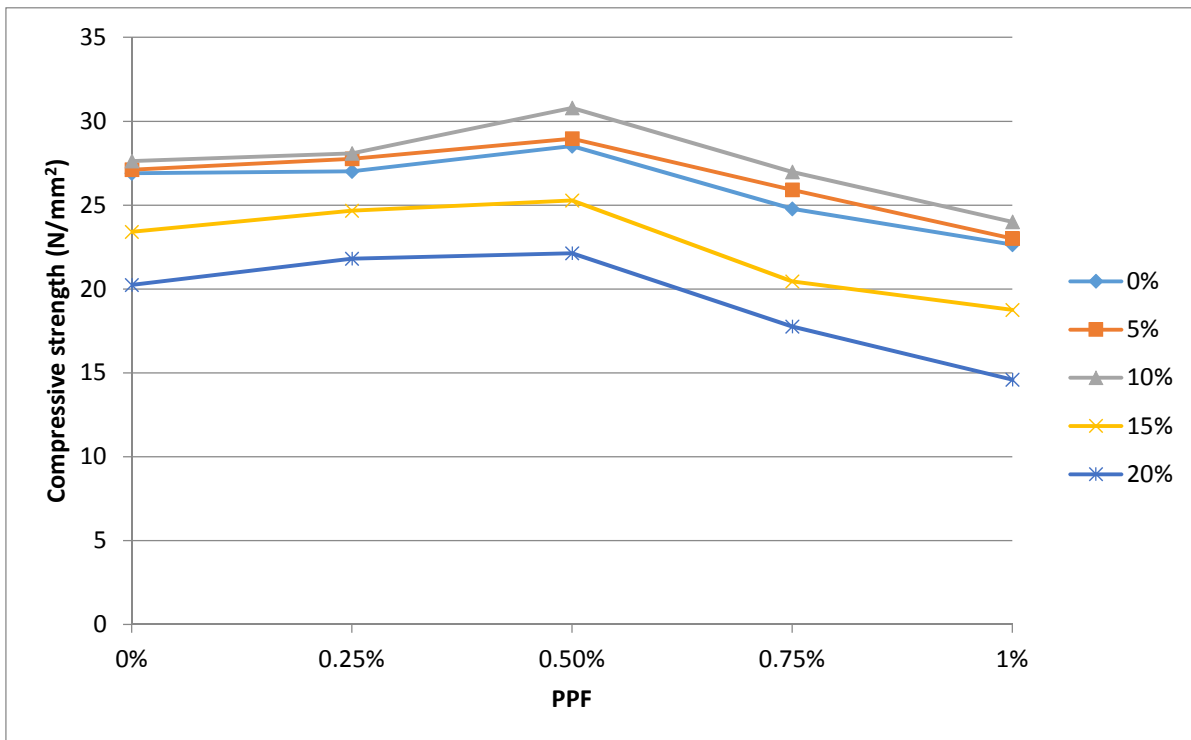


Figure 4: Compressive strength of different mixes at 28 days

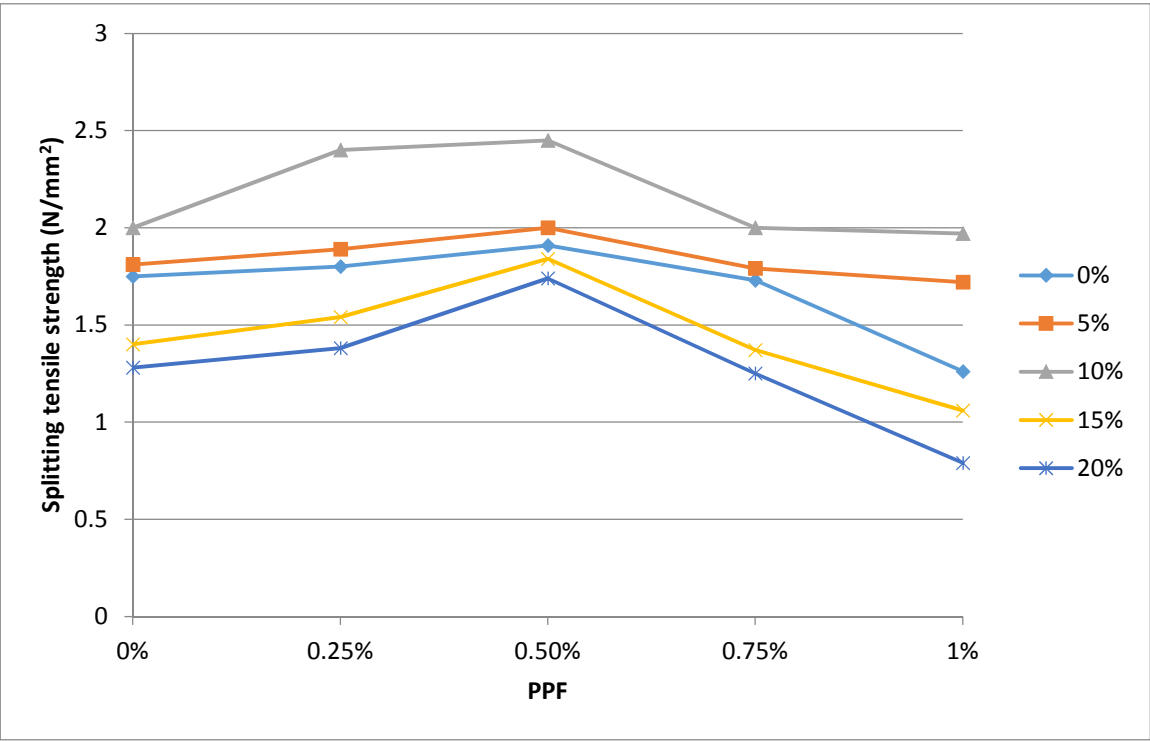


Figure 5: Splitting tensile strength of different mixes at 7 days

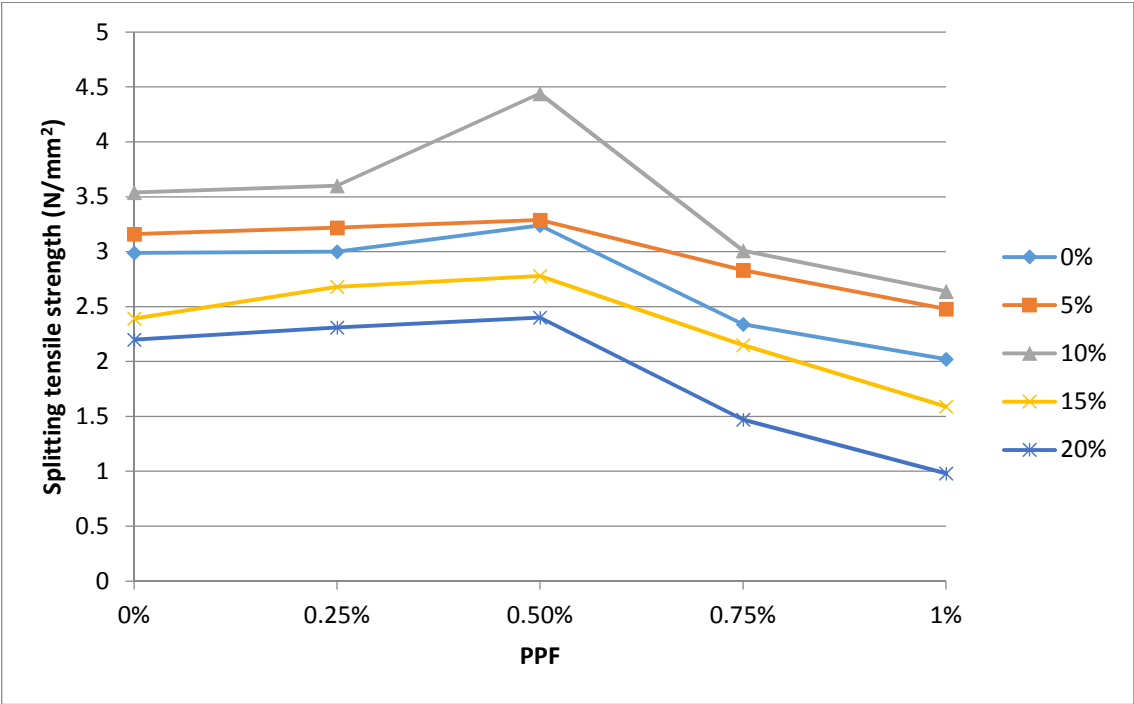


Figure 6: Splitting tensile strength of different mixes at 14 days

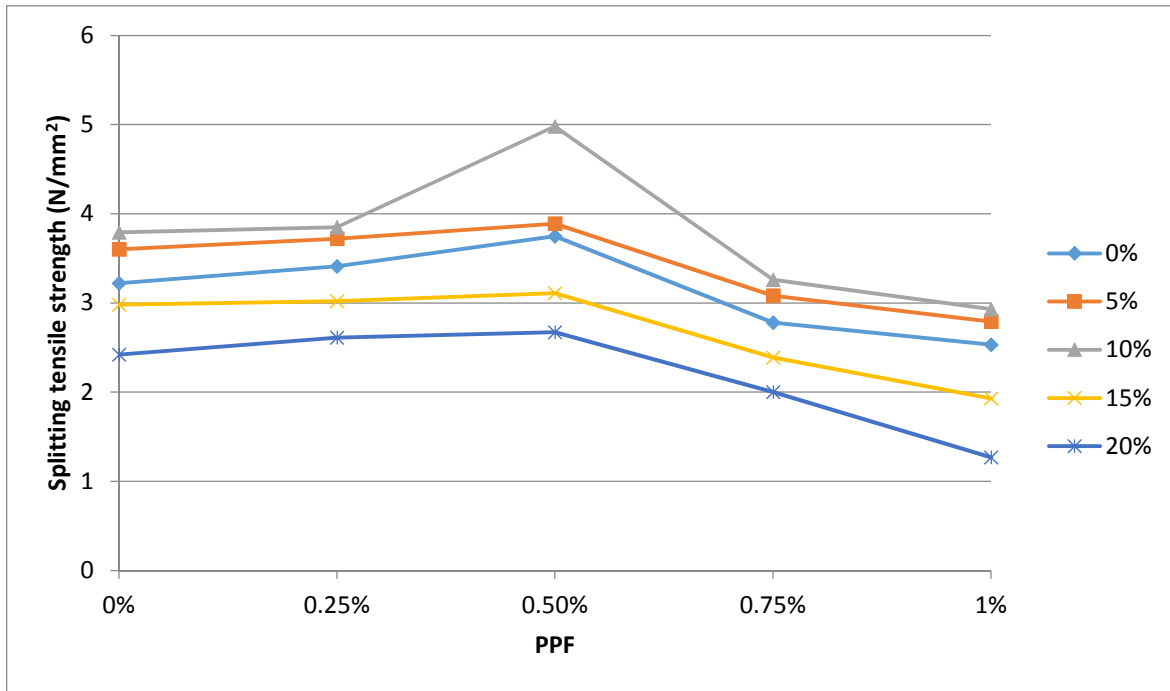


Figure 7: Splitting tensile strength of different mixes at 28 days

Results showed that the change in compressive strength and splitting tensile strength was minor up to 10% of hypo sludge but beyond 10% of hypo sludge, there was significant reduction in strength due to water absorbing capability of hypo sludge which disturbed the water cement ratio. At higher dosage of sludge, cement content decreases which leads to the weak bonds especially around sludge particles. This eventually caused early crack development during the testing. It was observed that the addition of PPF up to 0.5% showed the increase strength of concrete. After that the strength decreases for 0.75% and 1% of PPF. This is due to the fact that PPF attributes towards a good cohesion with other aggregates. But at higher dosage of fiber due to the formation

of air voids, the concrete becomes stiff and difficult to compact which tends to decrease the strength. The combined effect of the combination 10% of hypo sludge and 0.50% PPF showed the maximum compressive strength that is 30.79 N/mm² and splitting tensile strength that is 4.98 N/mm². This is because at higher dosage of sludge and PPF concrete loses its ability to adhere properly.

COEFFICIENT OF BRITTLINESS

Coefficient of brittleness is the value of the compressive strength divided by splitting tensile strength of the concrete [3]. The coefficient of brittleness at 28 days in shown in Figure 8.

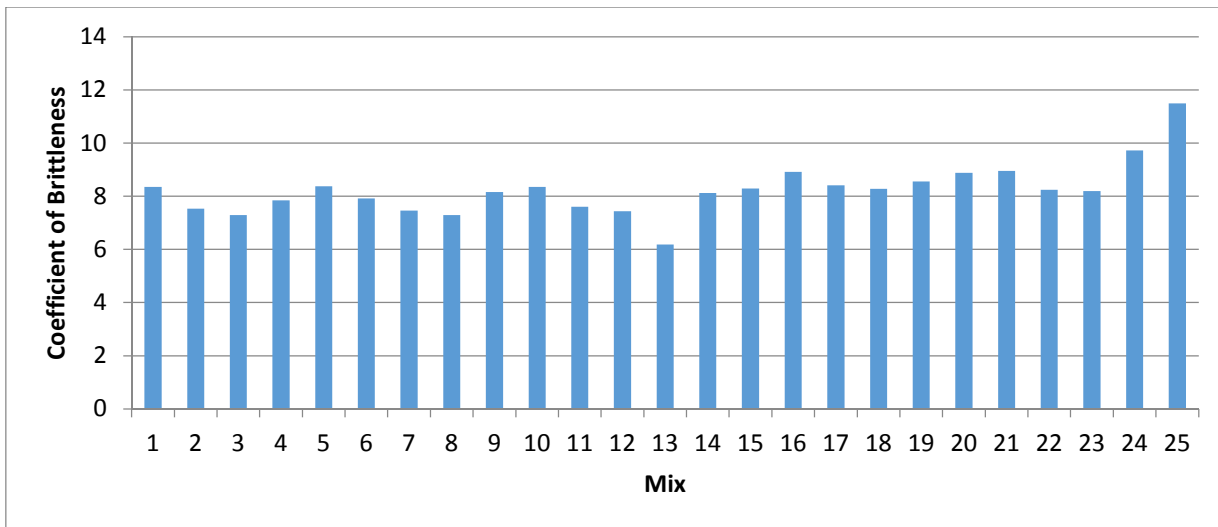


Figure 8: Variation of coefficient of brittleness for different mixes at 28 days of curing

The coefficient of brittleness is decreasing with increase in percentage of hypo sludge up to 10% beyond that coefficient of brittleness increases. This is because at higher dosage of sludge, cement content decreases which leads to the weak bonds especially around sludge particles. The coefficient of brittleness is decreasing with increase in percentage of polypropylene fiber up to 0.5% beyond that coefficient of brittleness decreases. Because of the formation of air voids at higher dosage of fiber, the concrete becomes stiff and difficult to compact. From Figure 8 it is recommended that the Mix M13 (10% hypo sludge and 0.5% polypropylene fiber) is best suited with least coefficient of brittleness that is 6.18. This is due to the fact that higher dosage of hypo sludge and polypropylene fiber affected the ability of concrete to adhere properly.

CONCLUSIONS

- The environmental pollution due to the disposal of waste from the paper mill industry can be minimized through this approach.
- This is an innovative step to reduce the global warming effect due to the production of cement. The amount of carbon dioxide released can be minimized.
- The workability of concrete decreases from medium to low with the increase in content of hypo sludge and PPF.
- Up to 10% of hypo sludge and 0.50% of PPF gives the maximum compressive strength and splitting tensile strength. M13 is best suited accordance with coefficient of brittleness.
- Hypo sludge is economically feasible for the temporary shelters during natural disasters where strength is not considerable factor.
- Results indicate that the compressive strength and the splitting tensile strength are in phase with each other. At the higher dosage of hypo sludge and PPF, concrete becomes brittle and hence the strength decreases.

REFERENCES

1. Ahmed S, Bukhari I A, Siddiqui J I and Qureshi S A (2006) A study on properties of polypropylene fiber reinforced concrete. *31st Conference on Our World in Concrete and Structures*. pp 63-72, Singapore.
2. Alam M and Berera V (2015) An experimental study on use of hypo sludge in cement concrete. *Int J Progr In* 14.

Civil Eng 2(1): 1-23.

3. Altindag (2003) Correlation of specific energy with rock brittleness concepts on rock cutting. *J South African Inst Min Metall* 163-172.
4. BIS: 10262-1982 (Reaffirmed 2004): Recommended guidelines for concrete mix design, Bureau of Indian Standard, New Delhi-2004.
5. BIS: 383-1970 (Reaffirmed 1997): Specification for Coarse and Fine Aggregates from Natural Sources for Concrete, Bureau of Indian Standard, New Delhi-1997.
6. BIS: 456-2000: Code of practice- plain and reinforced concrete, Bureau of Indian Standard, New Delhi-2000.
7. BIS: 516-1959 (Reaffirmed 2004): Methods of tests for strength of concrete, Bureau of Indian Standard, New Delhi-2004.
8. BIS: 5816-1999(Reaffirmed 2004): Splitting tensile strength of concrete-Method of test, Bureau of Indian Standard, New Delhi-2004.
9. BIS: 8112-1989 (Reaffirmed 2005): Specification for 43 grade Ordinary Portland Cement, Bureau of Indian Standard, New Delhi-2005.
10. Garcia R, Vegas I, Frias M and Rojas M I S (2007) The pozzolanic properties of paper sludge waste. *Constr Build Mater* 22:1484-90.
11. Ramezani pour A A, Esmaeili M, Ghahari S A and Najafi M H (2013) Laboratory study on the effect of polypropylene fiber on durability, and physical and mechanical characteristic of concrete for application in sleepers. *Constr Build Mater* 44:411-18.
12. Solanki J V and Pitroda J (2013a) Flexural strength of beam by partial replacement on cement with fly ash and hypo sludge in concrete. *Int J Eng Sci Innov Technol* 2(1): 173-79.
13. Solanki J V and Pitroda J (2013c) Study on modulus of elasticity of concrete with partial replacement of cement by hypo sludge waste from paper industry. *Global Res Anal* 2(1): 40-41.